


SERIES 101

- Standard Duty PVC General Purpose Suction and Transfer Hose.
- Clear and White PVC Material with Smooth Bore Design allowing unrestricted flow.
- Available in Solid Green Construction (SERIES 100).
- Temp Range -4 F to 150 F (Actual service range is dependent on application).

APPLICATIONS

- Construction and Mining Supply Lines.
- Irrigation Lines.
- Liquid Fertilizer Transfer.
- Agricultural Applications.
- Rock Dusting.
- Well point Systems.
- Trash Pump Hose.
- **Open end applications downstream of valve.**

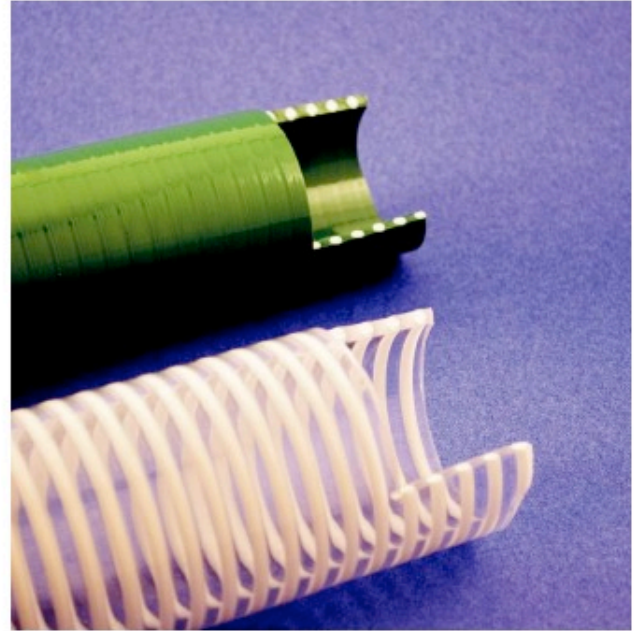

HOSE SPECIFICATIONS AND PACKAGING

Part Number	Inside Diameter (in)	Inside Diameter (mm)	Outside Diameter (in)	Outside Diameter (mm)	Working PSI (68°F)	Working PSI (104°F)	Vacuum Rating Hg (68°F)	Vacuum Rating Hg (104°F)	Approx. Bend Radius at 68°F	Standard Length (Foot)	Approx. Weight (Coil)
101-075	3/4"	19.0	1.01	25.6	110	70	28	26	3	100	19
101-100	1"	25.4	1.26	32.0	85	60	28	26	3	100	26
101-125	1 1/4"	31.8	1.56	39.6	85	60	28	24	4	100	35
101-150	1 1/2"	38.1	1.83	46.5	70	50	28	24	5	100	48
101-200	2"	50.8	2.32	59.0	65	45	28	24	7	100	66
101-250	2 1/2"	63.5	2.87	73.0	65	45	28	24	8	100	87
101-300	3"	76.2	3.43	87.0	60	40	28	22	10	100	124

Note:

Service life may vary depending on operating conditions and type of materials conveyed. Suitability of product for any application is the responsibility of the purchaser and user.

QUALITY IS NEVER AN ACCIDENT; IT IS ALWAYS THE RESULT OF HIGH INTENTION, SINCERE EFFORT, INTELLIGENT DIRECTION AND SKILLFUL EXECUTION.

